





Side view, right

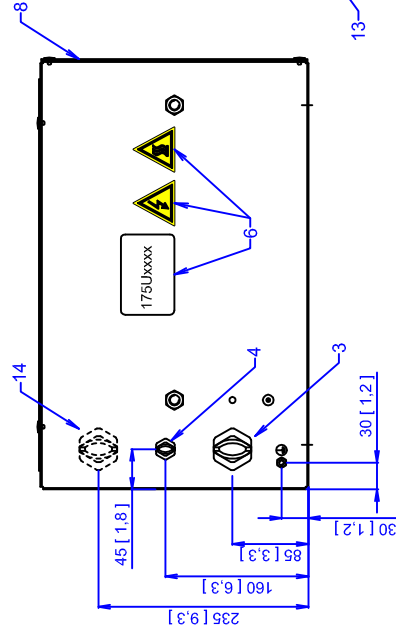


### Front view

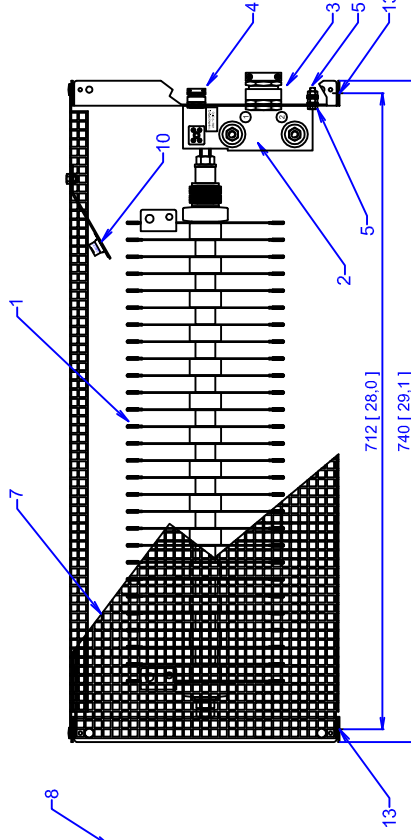

Side view, left

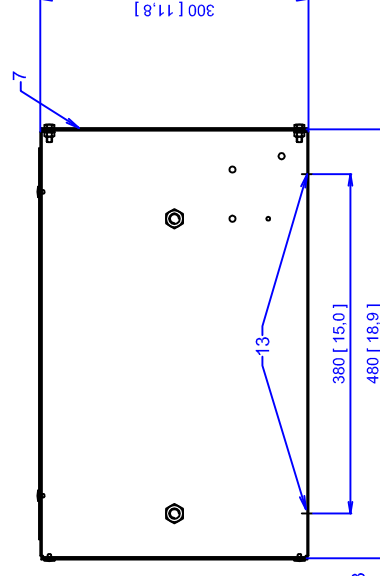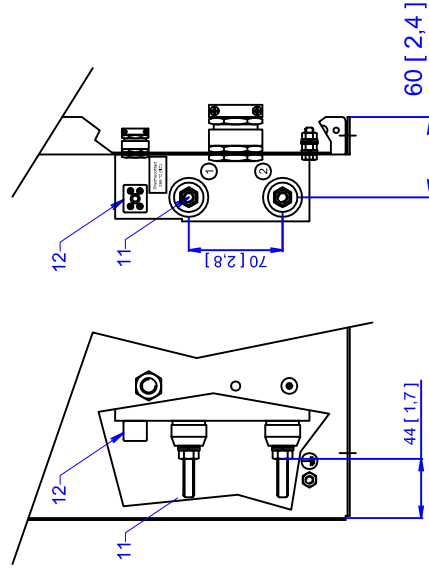[Detail view](#)

Top view

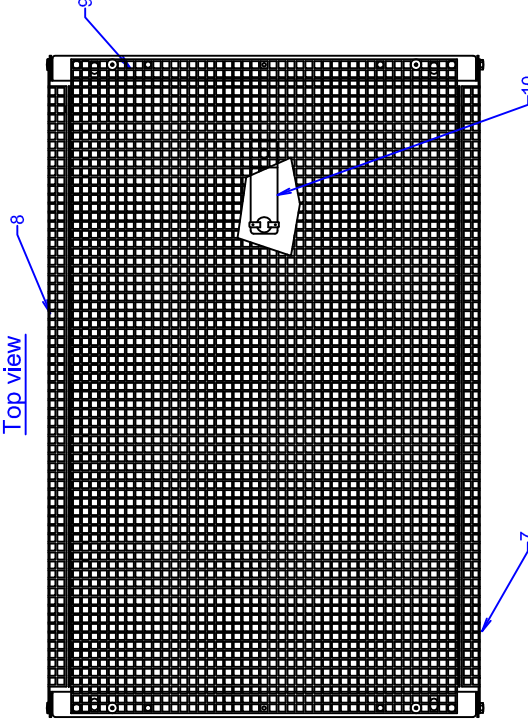

## DECLARATION

- |     |   |
|-----|---|
| 1.  | Resistor  |
| 2.  | Terminal board, see detail view   |
| 3.  | Cable gland for load cables   |
| 4.  | Cable gland M16 thermo contact cable                                      |
| 5.  | Eathing bolt M6   |
| 6.  | Name plate / Warning signs  |
| 7.  | Front cover IP20  |
| 8.  | Rear cover IP20   |
| 9.  | Top cover IP20  |
| 10. | Thermocontact 260 °C (NC)   |
| 11. | Load connection, 2x bolt M8   |
| 12. | Auxiliary connection for thermo contact, porcelain clamp 2,5 <sup>2</sup> |
| 13. | 4x fixing hole Ø 9mm  |
| 14. | Second cable gland (on demand)  |

CABINET TYPE: CM17					
Danfoss code	Typecode	Ohm	cable gland type for load cables (3)	Weight [kg]	
175U3072	MCE101C7R40P11K0E20BAW	7,4	M40		24
175U3075	MCE101C8R10P13K0E20BAW	6,1	M50		25
175U3083	MCE101C3R70P11K0E20BAW	3,7	M50		24
175U3084	MCE101C3R30P13K0E20BAW	3,3	2x M25		25
175U3201	MCE101C27R0P14K0E20BAW	27,0	M25		25
175U3204	MCE101C19R0P14K0E20BAW	19,0	M25		25
175U3206	MCE101C14R0P14K0E20BAW	14,0	M32		25
175U3224	MCE101C3R50P14K0E20BAW	3,5	M40		25

**Danfoss**  
Danfoss A/S  
Power Electronics Division  
Ulsnæs 1, 6300 Graasten  
Denmark

MCE101 Brake resistor  
xxR±10% IP20  
175C0608

<b>Material:</b>	Cabinet material: Zinc plated steel, without coating.
<b>Path:</b>	

917CM17

Drawing No.:	
--------------	--

Sheet: 1 of 1

This drawing is the property of DANOTHERM ELECTRIC A/S and must not be copied without their consent.