




Side view, right

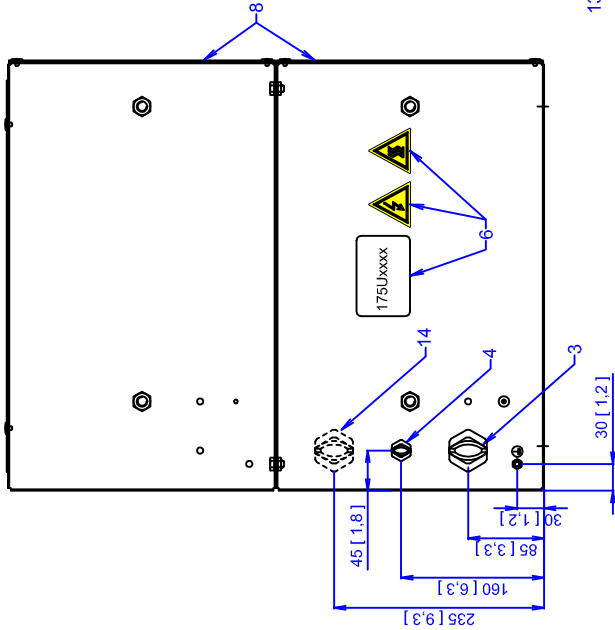


Front view

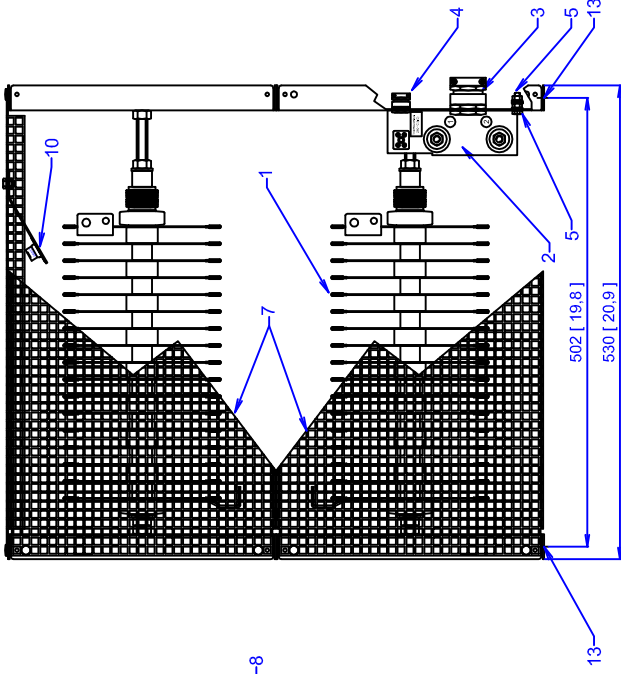


Side view, left

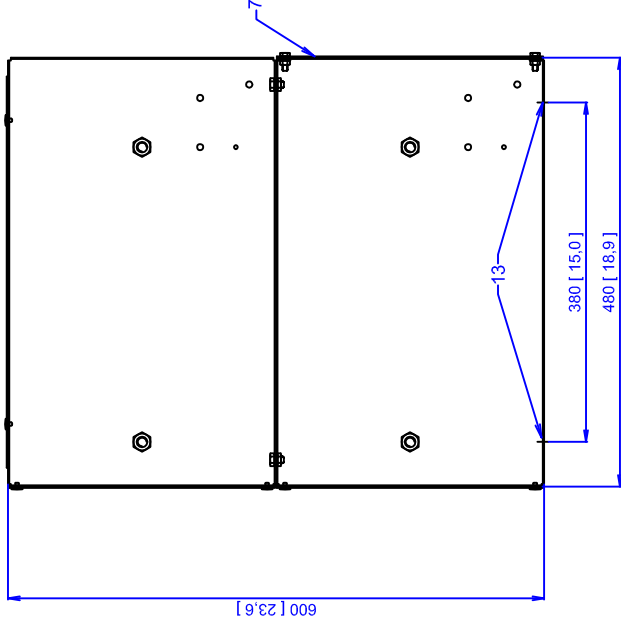

Detail view

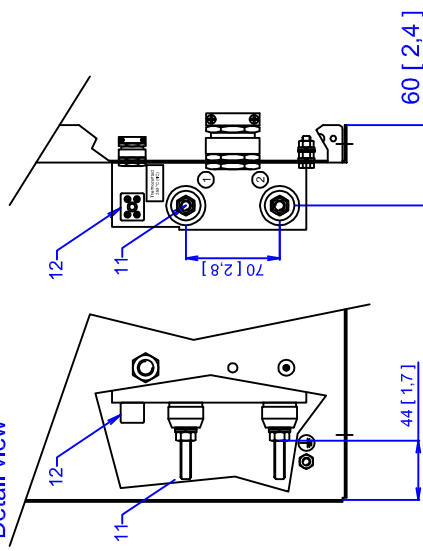

Top view

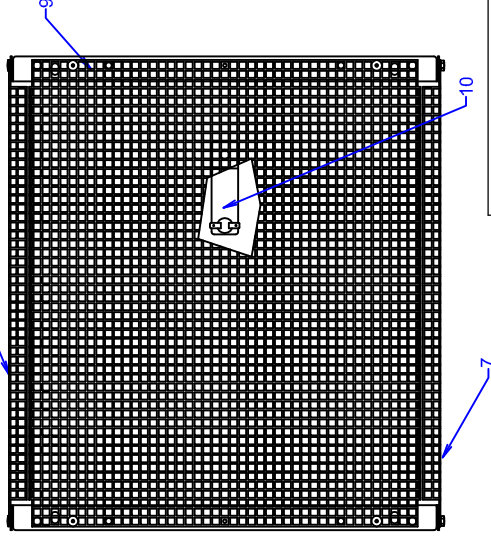

DECLARATION

1. Resistor
2. Terminal board, see detail view
3. Cable gland for load cables
4. Cable gland M16 thermo contact cable
5. Earthing bolt M6
6. Name plate / Warning signs
7. Front cover IP20
8. Rear cover IP20
9. Top cover IP20
10. Thermocontact 260 °C (NC)
11. Load connection, 2x bolt M8
12. Auxiliary connection for thermo contact, porcelain clamp 2,5" 4x fixing hole Ø 9mm
13. Second cable gland (on demand)
- 14.

CABINET TYPE: CM25				
Danfoss code	Typecode	Ohm	cable gland type for load cables (3)	Weight [kg]
175U3078	MCE101C5R00P16K0E20BAW	5,0	2x M25	35
175U3082	MCE101C4R00P20K0E20BAW	4,0	2x M32	37
175U3088	MCE101C2R70P16K0E20BAW	2,7	2x M32	35
175U3091	MCE101C2R10P20K0E20BAW	2,1	2x M40	37
175U3202	MCE101C22K0P17K0E20BAW	22,0	M25	35
175U3207	MCE101C14R0P17K0E20BAW	14,0	M32	35
175U3210	MCE101C12R0P17K0E20BAW	12,0	M32	35
175U3227	MCE101C2R80P17K0E20BAW	2,8	M40	35



**MCE101 Brake resistor**  
**xxR±10% IP20**  
**175C0609**

Danfoss A/S  
Power Electronics Division  
Ulstrup 1, 6300 Grøsten  
Denmark

Weight (g)	Date	Creator:	Approved:	Scale
–	14.03.2012	F. Bülle	H. Hansen	1:1
Tolerance:				
No.:	Last Revision:	Rev Date:	By:	Paper size:
01	12/264	04.06.2012	F. Bülle	A3
Any amendment must be confirmed by DANOTHERM ELECTRIC A/S				
Drawing No.:				
917CM25				
Sheet: 1 of 1				