

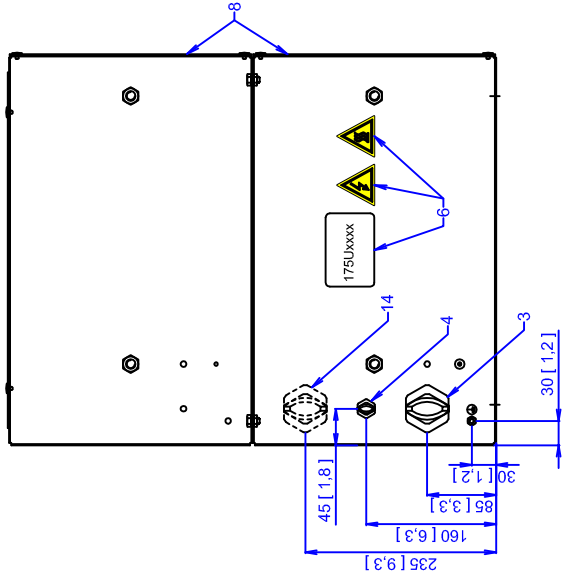



Side view, right

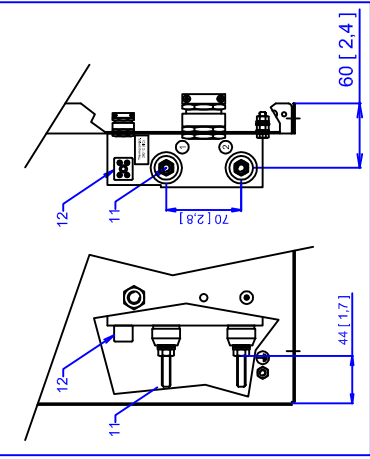


Front view

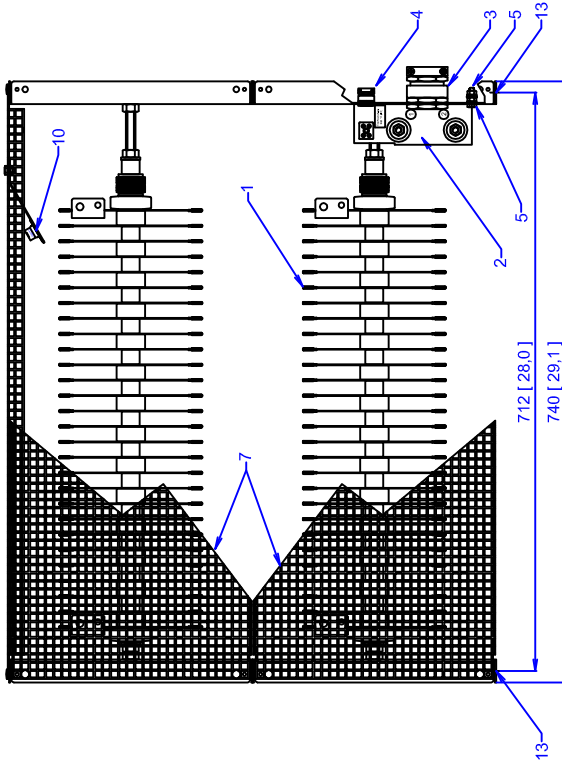

Top view

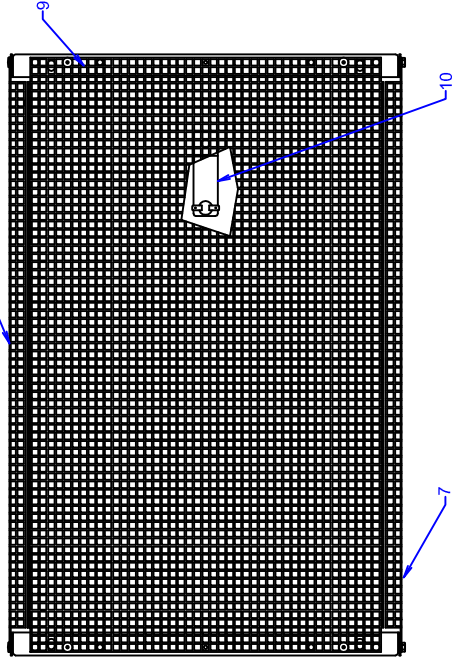

Side view, left

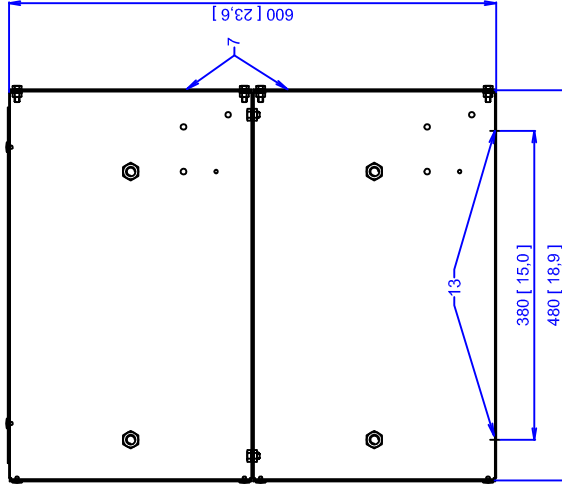

DECLARATION

1. Resistor
2. Terminal board, see detail view
3. Cable gland for load cables
4. Cable gland M16 thermo contact cable
5. Earthing bolt M6
6. Name plate / Warning signs
7. Front cover IP20
8. Rear cover IP20
9. Top cover IP20
10. Thermocontact 260 °C (NC)
11. Load connection, 2x bolt M8
12. Auxiliary connection for thermo contact, porcelain clamp 2,5"
13. 4x fixing hole Ø 9mm
14. Second cable gland (on demand)

CABINET TYPE: CM27

Danfoss code	Typecode	Ohm	cable gland type for load cables (3)	Weight [kg]
175U3085	MCE101C1R30P26KOE20BAW	3,3	2x M32	45
175U3089	MCE101C2R50P32KOE20BAW	2,5	2x M40	48
175U3093	MCE101C1R70P26KOE20BAW	1,7	2x M50	45
175U3097	MCE101C1R30P32KOE20BAW	1,3	2x M50	48
175U3205	MCE101C1R50P21KOE20BAW	15,5	M32	41
175U3208	MCE101C13R5P21KOE20BAW	13,5	M32	41
175U3209	MCE101C13R5P26KOE20BAW	13,5	M32	45
175U3211	MCE101C11R0P26KOE20BAW	11,0	M32	45
175U3213	MCE101C9R50P21KOE20BAW	9,5	M32	41
175U3216	MCE101C7R00P26KOE20BAW	7,0	M40	45
175U3241	MCE101C7R00P30KOE20BAW	7,0	M40	52

Danfoss
Danfoss A/S
Power Electronics Division
Ulstrup 1, 6300 Gråsten
Denmark

MCE101 Brake resistor
xxR±10% IP20
175C0610

Material: Cabinet material
Zinc plated steel, without coating.
Path:

Drawing No.:

917CM27

Sheet:
1 of 1

This drawing is the property of DANOTHERM ELECTRIC A/S and must not be copied without their consent.